

AVGIL

AVGIL 2500

AVGIL 2500 is a surface treated, super fine calcium carbonate powder produced in a unique process from selected raw materials of high purity and whiteness.

CHEMICAL ANALYSIS (raw material)

Calcium carbonate - CaCO_3	99.2%
Silica - SiO_2	0.20%
Magnesium Oxide - MgO	0.06%
Iron Oxide - Fe_2O_3	0.02%
Aluminum Oxide - Al_2O_3	0.05%
Sulphates	0.03%
Moisture content	0.27%
Loss of Ignition %	43%

FINENESS

Top cut (97%)	7 microns
Median particle size (50%)	2.2 microns
Finer than 2 microns	45 %

PARTICLES SIZE DISTRIBUTION

TEST METHOD: MASTERSIZER 2000 (MALVERN)

TECHNICAL DATA


Specific Gravity (Din 53193)	2700 kg/m^3
Packed bulk density	900 kg/m^3
Hardness	3.0. mohs
Oil absorption	20 g/100g
Specific surface area	2.3 m^2/g
Dry brightness, Green filter	95. %
pH	9.5

APPLICATIONS

Emulsion paints, sealants, plasters, polyester resins, synthetic marble, glues, plasticized PVC, household cleansers and acid neutralization.

PACKING SPECIFICATIONS

Available for delivery in 25 paper bags or 1 ton polypropylene bags.

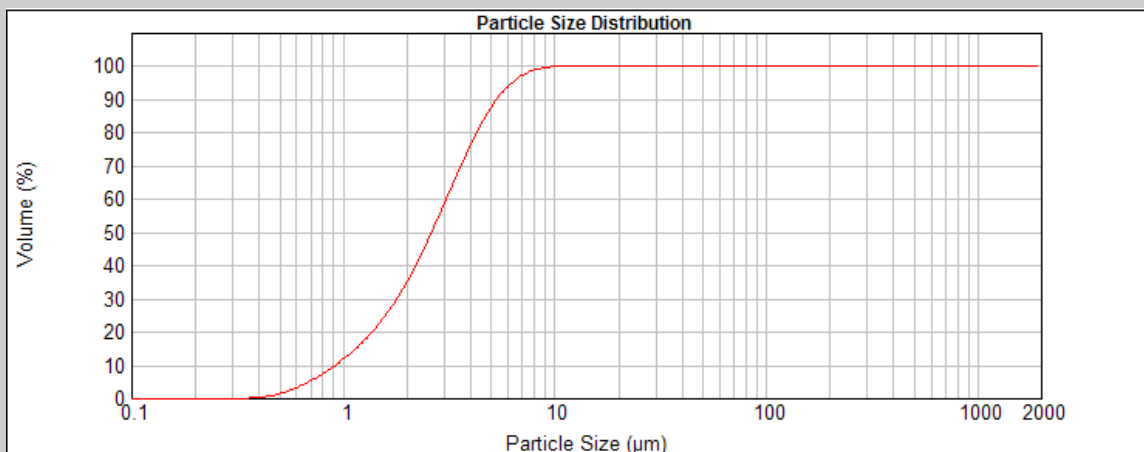

These figures are average values from numerous measurements. They cannot be taken as binding. Microgil assumes no liability with respect to these values.

Updated: January 2015